


[Série GGM GS200]

Exemples de commandes via le port console




Prérequis / configuration préalable :

[\[Série GGM GS200\] - Utilisation du port console \(ligne de commande\)](#)

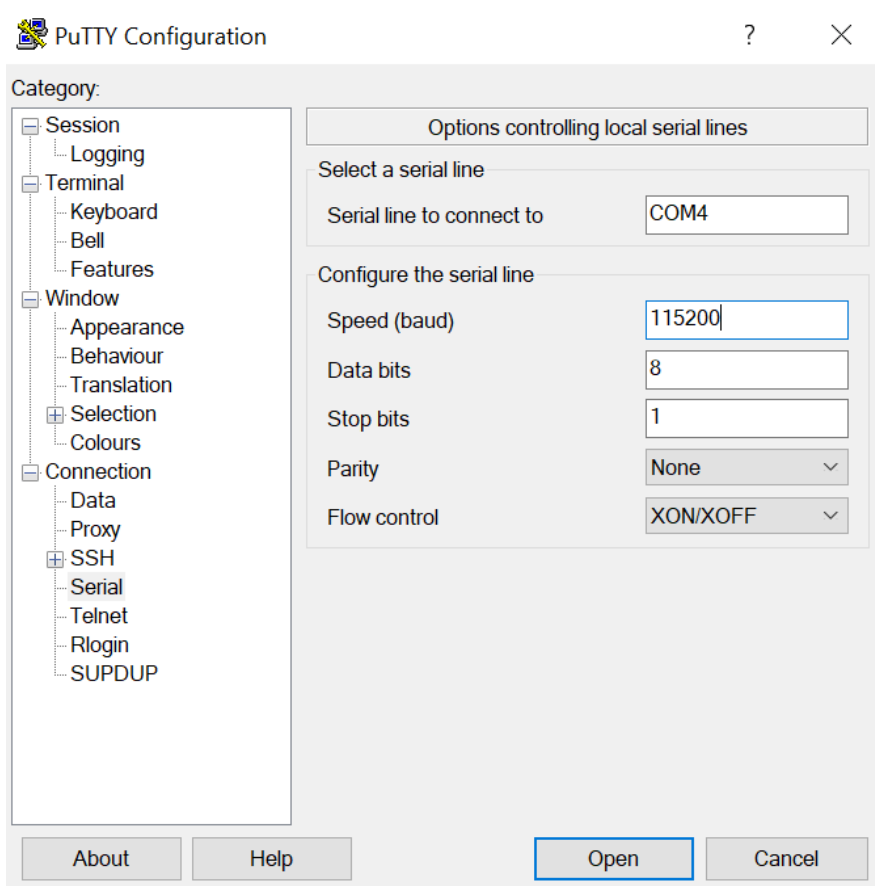

Appuyer sur le bouton OPEN, un écran noir devrait s'ouvrir, appuyer sur la touche entrer puis connecter vous sur votre switch.

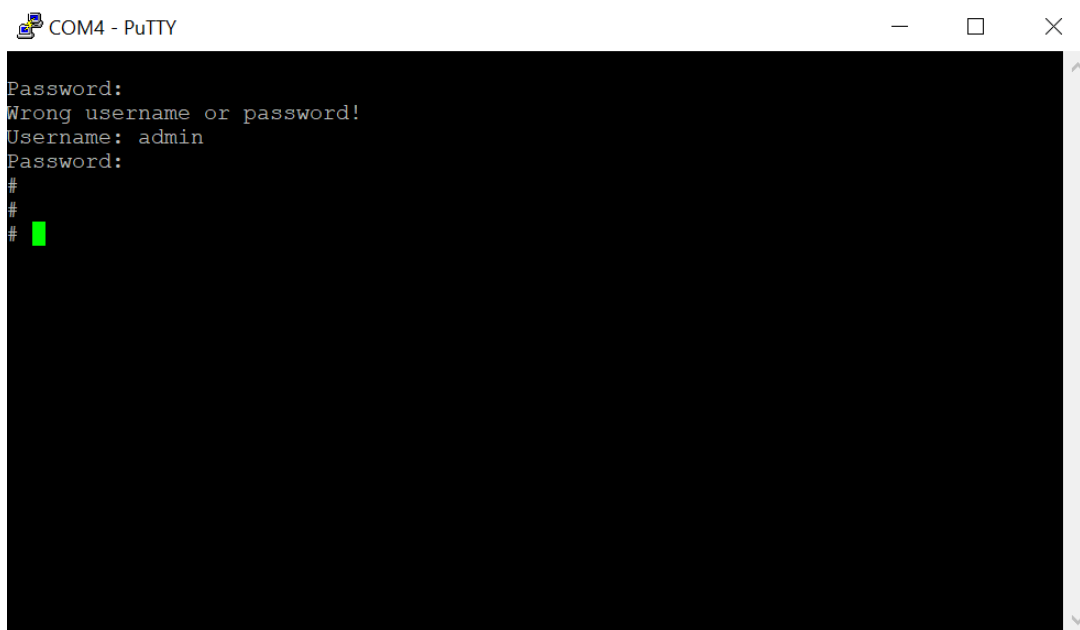

Quelques commandes importantes :

Show version : permet de voir des informations du switch (adresse mac, version, etc)

```
# show version

MEMORY           : Total=80461 KBytes, Free=59439 KBytes, Max=59052 KBytes
FLASH            : 0x40000000-0x40ffffff, 256 x 0x10000 blocks
MAC Address      : 8c-79-21-02-cb-93
Serial No       :
Previous Restart : Cool

System Contact   : www.gigamedia.net
System Name      : Switch
System Location  :
Timezone Offset  : 0
System Time      : 1970-01-01T00:38:30+00:00
System Uptime    : 00:38:30

Active Image
-----
Image            : FW_GGMGS20024P2S_10_01_2020_EN.dat (primary)
Version          : V2.1
Date             : 2020-01-10T06:47:07-08:00

Alternate Image
-----
```

Show loop-protect: permet de voir s'il y a des boucles et si la protection est active

```
# show loop-protect

Loop Protection Configuration
=====
Loop Protection      : Disable
Transmission Time   : 5 sec
Shutdown Time       : 180 sec

GigabitEthernet 1/1
-----
    Loop protect mode is enabled.
    Action is shutdown.
    Transmit mode is enabled.
    No loop.
    The number of loops is 0.
    Status is down.

GigabitEthernet 1/2
-----
    Loop protect mode is enabled.
    Action is shutdown.
    Transmit mode is enabled.
    No loop.
-- more --, next page: Space, continue: g, quit: ^C
```

Reload cold: permet de redémarrer le switch

```
# reload cold
% Cold reload in progress, please stand by.
# W ddm1 65/read_ddmi_a0#345: Warning: SFP Module on Port 25 have no vendor information
W ddm1 65/read_ddmi_a0#345: Warning: SFP Module on Port 26 have no vendor information
+M25PXX : Init device with JEDEC ID 0xC22018.
Luton26 board detected (VSC7427 Rev. D).

RedBoot(tm) bootstrap and debug environment [ROMRAM]
Non-certified release, version 1_20-Vitesse - built 01:17:53, Jul 14 2019

Copyright (C) 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009
Free Software Foundation, Inc.
RedBoot is free software, covered by the eCos license, derived from the
GNU General Public License. You are welcome to change it and/or distribute
copies of it under certain conditions. Under the license terms, RedBoot's
source code and full license terms must have been made available to you.
Redboot comes with ABSOLUTELY NO WARRANTY.

Platform: VCore-III (MIPS32 24KEc) LUTON26
RAM: 0x80000000-0x88000000 [0x80027c30-0x87fdfffc available]
FLASH: 0x40000000-0x40ffffff, 256 x 0x10000 blocks
== Executing boot script in 3.000 seconds - enter ^C to abort
RedBoot> diag -a
Hardware self-test: ... Passed
IS1 TCAM self-test: ... Passed
IS2 TCAM self-test: ... Passed
ES0 TCAM self-test: ... Passed
DDR SDRAM: Testing [0x80027c30-0x87fdfffc] - Zero Sweep Done
DDR SDRAM: Testing [0x80027c30-0x87fdfffc] - Write Sweep .....
..... Done
DDR SDRAM: Testing [0x80027c30-0x87fdfffc] - Read Sweep .....
..... Done
3 tests completed successfully.
RedBoot> fis load -d managed
Image loaded from 0x80040000-0x80e40350
RedBoot> go

Press ENTER to get started
```

Reload defaults: permet de remettre le switch à zéro

```
# reload defaults
% Reloading defaults. Please stand by.
# GigabitEthernet 1/25 does not have PoE support
GigabitEthernet 1/26 does not have PoE support
```

Ping ip [adresse ip]: permet de faire un ping sur une adresse définie

```
# ping ip 192.168.2.190
PING server 192.168.2.190, 56 bytes of data.
64 bytes from 192.168.2.190: icmp_seq=0, time=0ms
64 bytes from 192.168.2.190: icmp_seq=1, time=0ms
64 bytes from 192.168.2.190: icmp_seq=2, time=0ms
64 bytes from 192.168.2.190: icmp_seq=3, time=0ms
64 bytes from 192.168.2.190: icmp_seq=4, time=0ms
Sent 5 packets, received 5 OK, 0 bad
```

show mac address-table: permet de voir les vlan mac

```
# show mac address-table
Type      VID  MAC Address      Ports
Static    1    00:23:63:32:18:11 GigabitEthernet 1/5,14,21
Static    1    33:33:00:00:00:01 GigabitEthernet 1/1-26 CPU
Static    1    33:33:00:00:00:02 GigabitEthernet 1/1-26 CPU
Static    1    33:33:ff:02:cb:93 GigabitEthernet 1/1-26 CPU
Dynamic   1    74:78:27:16:da:f7 GigabitEthernet 1/8
Static    1    8c:79:21:02:cb:93  CPU
```