

GGM KITIP

Remote Access with your Smartphone with VIEWCAN App

Using the DYNDNS : DDNS.GIGAMEDIA.NET



Valid for those references :

- GGM KITIP2C
- GGM KITIP4C
- GGM KITIP8C
- GGM KITIPNVR
- GGM KITIPNVR8

Warning, your system must have the latest firmware Version.

Available here:

[GGM KITIP - Upgrade your recorder \(IP KIT\) - Before 2018](#)

You can use your fixed public IP address or the dyndns of your choice from the list below OR use our free DYNDNS GIGAMEDIA (ddns.gigamedia.net)


- GIGAMEDIA
- REELINK
- 88110
- DYNDNS
- DNSEXIT
- NO-IP
- CHANGEIP

Using the DYNDNS : DDNS.GIGAMEDIA.NET


- 1- Please activate the DYNDNS VIEWCAN in your recorder (START/ Advanced Config / Network APP / DDNS)



- 2- You need to set up Port Forwarding on your router manually.
 3- [or Automatically by using UPnP Protocol]

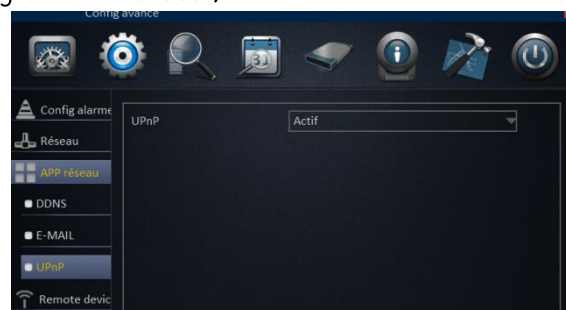

Step 1: Please download and install [ViewCan](#) Application (Play Store/Apple Store)



Step 2: Choose Login Type « Server » (ex :www.viewcan.net).

Step 3: Add this server : **ddns.gigamedia.net**



Scan your QRcode or Add it Manually and fill in Password of your recorder and LOGIN

Step 4 : Go to **Liveview**, use **Select** and choose Serial Number of your recorder

