

## GGM KITIP24xx-48xx

### Change the Recording Mode




#### Valid for those references :

- GGM NVRL0104
- GGM NVRL0104P
- GGM NVRL0108P
- GGM NVRE0104P
- GGM NVRE0108P
- GGM KITIP24C5MP
- GGM KITIP48C5MP

#### Where and How ?

Go to the **Main Menu** / SETUP then Record and again Record. Last, Record Schedule.

This menu allows you to specify when the records video and defines the recording mode for each channel.

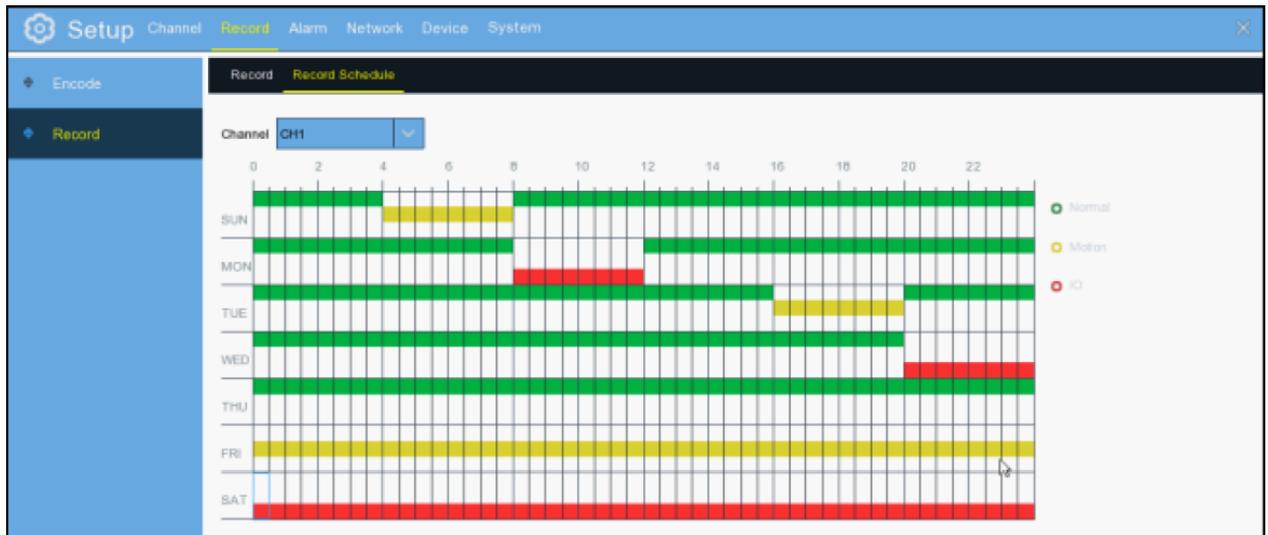

The recording schedule lets you set up a schedule like, daily and hourly by normal (continuous) recording, motion Detection, or I/O alarm.

3 colors are used :

- **Normal (GREEN)** = Continuous Recording
- **Motion (YELLOW)** = Motion Detection Recording
- **IO (RED)** = Recording from Alarm contacts (I/O Port)
- **No Color** = No Record.