

## GGM CCKITAHD

### Receive an email when motion detection is triggered



Valid for those references :

- GGM CCKITAHD
- GGM CCKITAHD4
- GGM CCKITAHD8
- GGM CCEL2KITAHD4
- GGM CCKITAHD 1080P
- GGM CCAHDXX
- GGM CCELXX

**For any configuration, you need to connect a monitor (HDMI or VGA) directly on the back of your recorder.**

You can receive an email as soon as an alarm is activated in your recorder.


Example : You want to receive an email as soon as motion detection is triggered.



Le SMTP (Simple Mail Transfer Protocol) is the standard protocol for email services on a TCP/IP network. SMTP provides the ability to send and receive email messages.

## Step 1 : Configure your server for email (SMTP)

Go to **Main Menu** then **Network and Email**

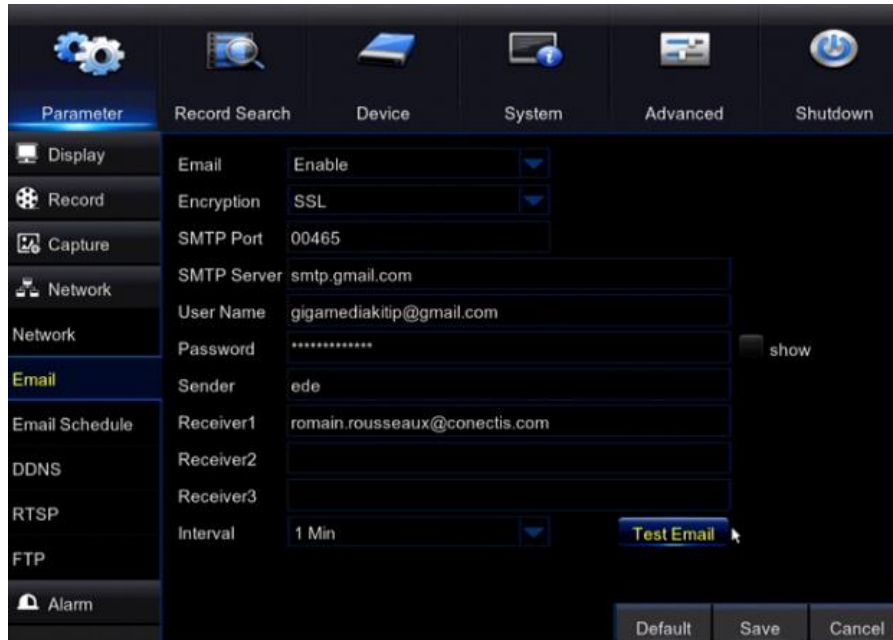

1 – Basculer sur **Activer**

3 – Fill in your information of your SMTP server or according your provider

**Caution:** Ask those informations from your IT administrator or from your provider.

Example : Orange - SMTP Server : **smtp.orange.fr** and specific Port...

Other Example with Gmail :

Server (smtp) : smtp.gmail.com

Port : 465

Encryption : SSL / TLS

User Name : Gmail address

Password : Gmail Password

Sender : email header

Receiver1 : Destination email 1

Receiver2 : Destination email 2

...

**SAVE** and use **Test Email** button for Test.

## Step 2 : Enable Motion Detection and choose actions you want to do

Go to **Main Menu** then **Parameter** then **Alarm** and **Motion**



Enable: Send Email.

SAVE and Test

**Caution** : This method is NOT recommended for outdoor cameras.